



MODEL WSS - Discharge Water Separator/Silencer

Burgess Manning Discharge Separator/Silencer
For Water-Sealed Vacuum Blowers

Description:

Burgess-Manning centrifugal type water separator/silencers are designed to remove entrained liquid from air in a vacuum system while providing noise reduction.

Features:

- 99% efficient extraction of free liquid
- Up to 10dB noise reduction
- Economically priced
- Long service life

Theory of Operation:

Air flow passes through a separation section where 99% of the free liquid is extracted centrifugally.

Specifications:

Extraction Efficiency: 99% of Free Liquid

Noise Reduction: Up to 40 dB

Maximum Operating Pressure: 10 psig



Typical Sizes: 1" - 30"
Larger Sizes Available
Upon Request


Standard End Connections: NPT or 125# ANSI
Flanged

Standard Material of Construction: Carbon Steel
Other Materials Available
Upon Request


Finish: Prime Coated
Exterior

Burgess-Manning model WSS Water Separator

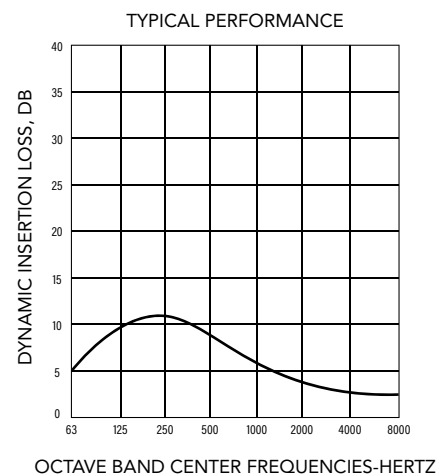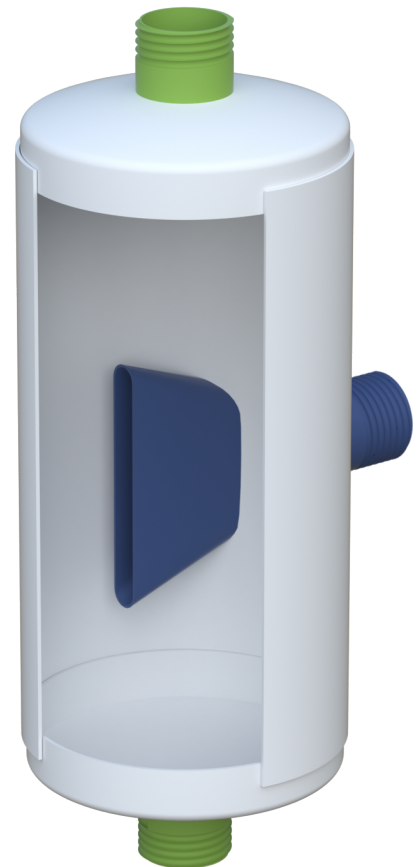

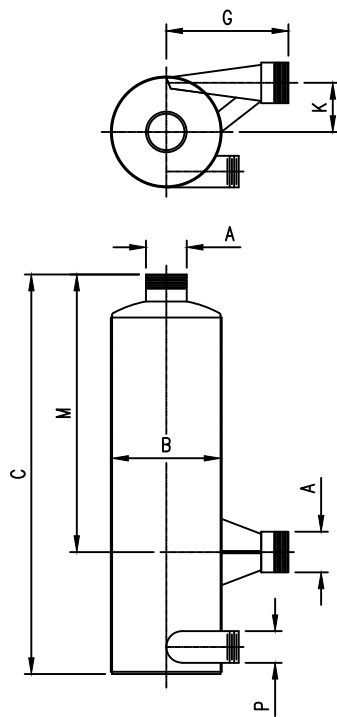

WSDA
SIZES 1" THRU 3"

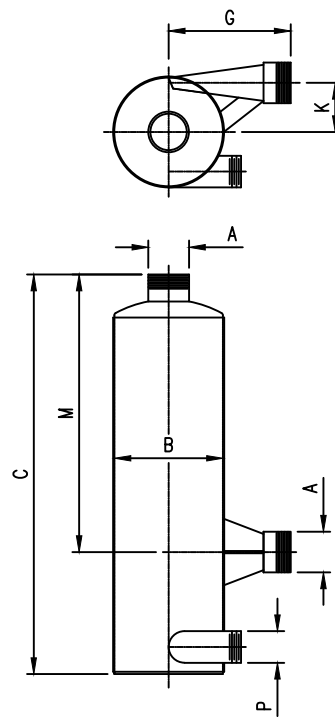

WSDA
SIZES 3 1/2" AND LARGER

Catalog Number	Dimensions in Inches							Estimated Weight in lbs.
	A	B	C	G	K	M	P	
WSDA-1	1	4 1/2	14	6	2 3/32	8 3/4	1	10
WSDA-1.25	1 1/4	4 1/2	14	6	2 1/16	8	1	10
WSDA-1.5	1 1/2	6	17	7	2 3/4	10	1 1/2	15
WSDA-2	2	8	22	9	3 11/16	13	2	25
WSDA-2.5	2 1/2	10	24	10	4 5/8	14	2	35
WSDA-3	3	10	27	11	4 9/16	16	2 1/2	50
WSDA-3.5	3 1/2	12	30	12	5 1/2	18	2 1/2	60
WSDA-4	4	12	29	13 1/2	5 7/16	18 1/2	3	85
WSDA-5	5	16	35	14 1/2	7 5/16	21 1/2	3	130
WSDA-6	6	18	42	18	8 3/16	27	3	175
WSDA-8	8	22	52	21 1/2	9 15/16	32	3	285
WSDA-10	10	24	56	26	10 11/16	32	3	440
WSDA-12	12	30	69	31 1/2	13 7/16	40 1/2	4	685
WSDA-14	14	36	75	36 1/2	16 1/4	43	4	1390
WSDA-16	16	42	88	41 1/2	18 7/8	52	4	1860

NOTES: - Flanges are drilled to match 125 lb. American Standard Flanges
 - Larger units available upon request
 - Specifications subject to change without notice